



LYNX 4

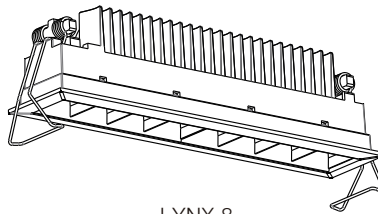


LYNX 8

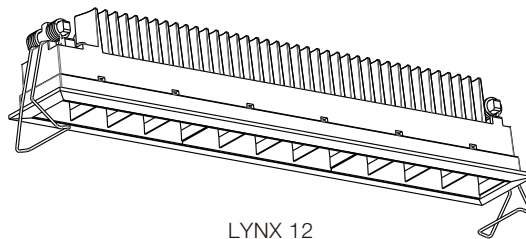


LYNX 12

**FIXTURE INSTALLATION**




Step 1: Cut specified size  
LYNX 4 - 105mm X 36mm  
LYNX 8 - 203mm X 36mm  
LYNX 12 - 298mm X 36mm


⚡ Please make sure that main voltage is disconnected before proceeding!




Step 2: Connect the power wires from AC power source to the primary side(L&N) of LED driver.

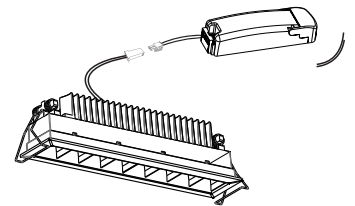


Step 3: Connect the fitting with secondary side of LED driver by quick-fit plug




Step 4: Insert LED driver into ceiling




Step 5: Carefully press on the two mounting clips simultaneously and insert the fitting into ceiling until the bottom flange is flushed with the ceiling.




Step 6: Installation is completed



LYNX 4 TRIMLESS



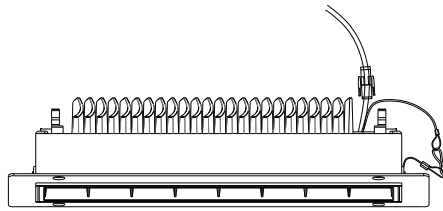


LYNX 8 TRIMLESS

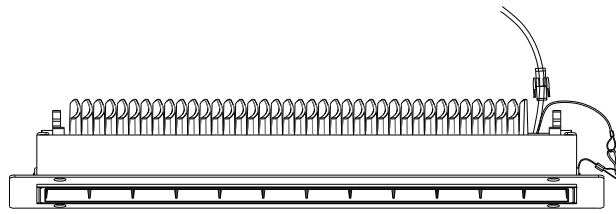

LYNX 12 TRIMLESS



**FIXTURE INSTALLATION**



Step 1: Cut specified size  
LYNX 4 Trimless - 105mm X 38mm  
LYNX 8 Trimless - 203mm X 38mm  
LYNX 12 Trimless - 298mm X 38mm

Step 2: Insert the pre-mounted kit to the ceiling, and fasten it by 4 screws.

Step 3: Plaster ceiling to hide screws and pre-mounted kit.

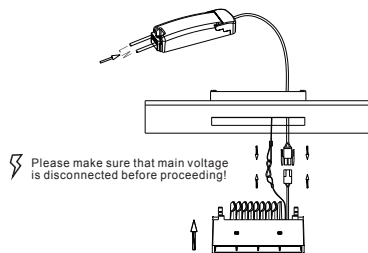

Step 4: Connect the power wire with the LED power supply, and insert the fitting into the mounted kit, until it locked.

Step 5: Removal or replacement:  
Use the dismantled device to insert the mini hold on the side, and then pull down carefully.