


CABINET TILT





1W / 3W CABINET RECESSED MOUNTED LUMINAIRE

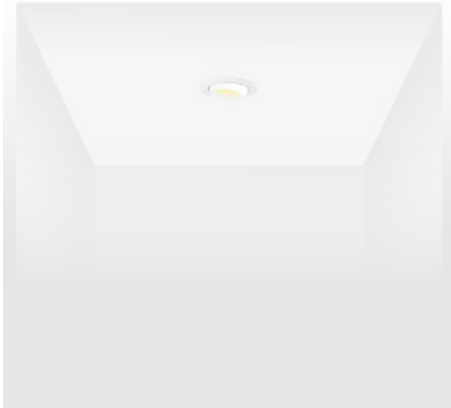

- High CRI, Excellent glare control
- Supplied with non-dimmable driver
- 1W: 101.5 lm/W & 3W: 60.2 lm/W
- Colour rendering index: ≥ 90
- Colour temperature options: 2700K, 3000K
- Beam pattern options: 15°, 20°, 25°, 35°
- 3 steps MacAdam ellipse binning
- Uniform and comfort light
- Aluminium & Plastic Material
- Cutout: $\varnothing 35$
- IP20

The information above is at nominal values accuracy of $\pm 7\%$.

FIXTURE COLOUR OPTIONS

-  Matt White
-  Matt Black
-  Specular
-  Darklight

AVAILABLE OPTIONS

DRIVER




(ND)

TEMPERATURE



BEAM ANGLE



15° 20° 25° 35°

APPLICATION


- Hotel and galleries
- Offices
- Retail, fashion stores and showroom
- Residential

TECHNOLOGY BENEFITS

- Superior light rendering quality offering balanced white with embedded green and red tone
- Excellent cost savings and quicker ROI
- Quick installation, no costly modification required
- Low maintenance
- Comfort, safety and no glass

DIMENSIONS (MM)

**Displayed height measurements are for highest point of fitting.*



SYSTEM SPECIFICATIONS

LED Lamp Power	LED System Power	Colour	Beam Angle	CRI 90		Driver Options
				Intensity (cd)	Luminous Flux	
1.05W	1W	WARM : 2700K WARM : 3000K	15°	659	95.5	ND
			20°	431.3	93.5	
			25°	386.2	99.5	
			35°	237.9	101.5	
2.1W	3W		15°	1136	163.4	
			20°	844	165.8	
			25°	724.3	180.6	
			35°	398.7	173.9	

Data are based on 3000K. Nominal data of 2700K and 4000K are shared with 3000K. Higher CCT of 4000K will have a nominal data value of 5% higher than published.

the table information is at nominal values accuracy of +/-7% nominal CRI ~95, equal to Ra >90-97, R9 > 50

DETAILS SPECIFICATION

Family Type	Cabinet Series
Mains voltage	220-240V
Colour options	Matt Black, Matt White, Specular, Darklight
Installation Compatibility	Cabinet
Lifetime	50,000 HOURS (80% lumen maintenance at Ta = 25°C)
Mains connection	Screw terminal connection
Materials	Aluminium, plastic
Fire safety	VW-1
Flammability mark	F
IP code	IP20
Safety class	Class 2
Standards	IEC 60598-1, IEC 61347-2-13
Regulatory markings	CE, CCC
Dimensions	Ø39 x 40mm

FIXTURE					DRIVER
LED Power	Colour	Beam Angle	Colour Temp	CRI	Dimming
CABINET-T1 1W	—	—	—	—	—
CABINET-T3 3W	WH Matt White	15 15°	27 2700K	90 CRI 90	ND Non-Dim
	MB Matt Black	20 20°	30 3000K		
	S Specular	25 25°			
	D Darklight	35 35°			

example: CABINET-T1.WH.15.30.90.ND