


LT42F PROFILE

FLAT LINEAR TASK LUMINAIRE

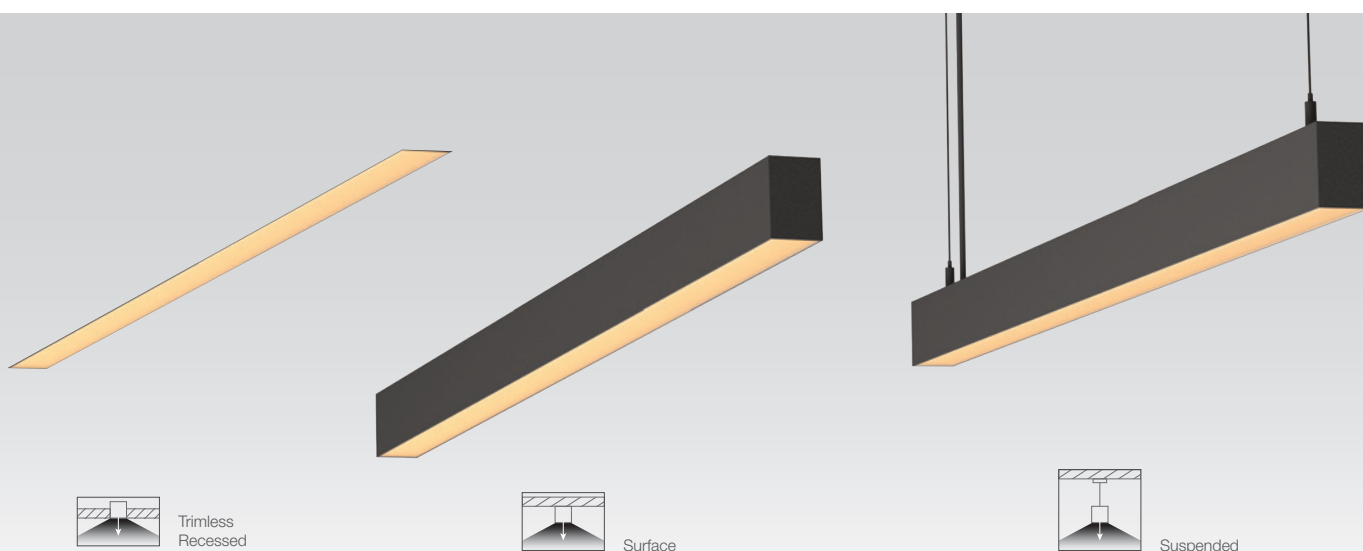

AVAILABLE OPTIONS

COLOUR OPTIONS

MATT BLACK



MATT WHITE




CCT OPTIONS


SINGLE CCT



tuneWHITE




DIMENSIONS (MM)



Type	42mm width Individual high-efficiency linear LED luminaire
Material	Aluminium and PMMA
Finishing	Matt Black / Matt White
Cover	Diffused
Light Uniformity	Dot-less
Mounting	Surface, suspended, or trimless recessed
CRI	ProART
SDCM	3 step MacAdam ellipse binning
Lifetime	Up to 50,000 hours L80 lamp life at Ta = 25°C
Voltage	220-240V AC
Power (Length) Options	17W (875mm), 21W (1135mm), 30W (1475mm)
Beam Angle	110°
Operating Temperature	Ta (min) = -20°C, Ta (max) = +50°C
Wire Connection	Push-pin terminals
IP Rating	IP20

PHOTOMETRICS





Downlight_ Workspace Lighting

SPECIFICATIONS

- Single CCT

CCT	Efficacy (lm/W)	Luminous Flux (lm)		
		30W (1475mm)	21W (1135mm)	17W (875mm)
2700K	112.9	3388	2372	1920
3000K				
3500K				
4000K	118.6	3558	2490	2016
5000K				

- tuneWHITE 1800K - 3100K

CCT	Efficacy (lm/W)	Luminous Flux (lm)		
		30W (1475mm)	21W (1135mm)	17W (875mm)
1800K	107.6	3227	2259	1829
3100K	112.9	3388	2372	1920

- tuneWHITE 1800K - 4000K

CCT	Efficacy (lm/W)	Luminous Flux (lm)		
		30W (1475mm)	21W (1135mm)	17W (875mm)
1800K	107.6	3227	2259	1829
4000K	118.6	3558	2490	2016

- tuneWHITE 2700K - 6500K

CCT	Efficacy (lm/W)	Luminous Flux (lm)		
		30W (1475mm)	21W (1135mm)	17W (875mm)
2700K	112.9	3388	2372	1920
6500K	118.6	3558	2490	2016



ORDERING MATRIX

Model	Finishing		Mounting		Power		Beam Angle		CCT			Driver					
LT42F	WH	Matt White	SM	Surface	17	17W (875mm)	110	110°	Single CCT	27	2700K	ND	Non-dim				
	MB	Matt Black	PM	Suspended	21	21W (1135mm)				30	3000K	DA	DALI				
										RM	Trimless Recessed	30	30W (1475mm)	35	3500K		
														40	4000K		
										50	5000K						
									tuneWHITE	TW1831	tuneWHITE 1800K-3100K	DA	DALI				
										TW1840	tuneWHITE 1800K-4000K						
										TW2765	tuneWHITE 2700K-6500K						

Example: LT42F-MB-SM-17-110-40-ND
LT42F Linear Task Luminaire, Matt Black, Surface Mounted, 17W (875mm), 110° Beam Angle, 4000K, Non-dim