




LT65FUL PROFILE

FLAT LINEAR TASK LUMINAIRE WITH UP LIGHT

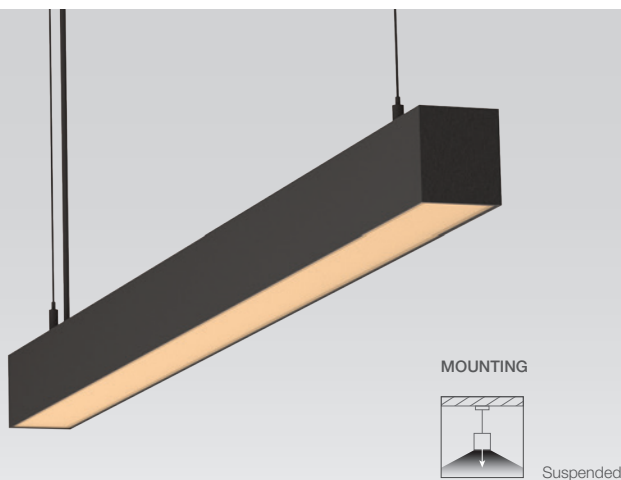

AVAILABLE OPTIONS

COLOUR OPTIONS

MATT BLACK



MATT WHITE



CCT OPTIONS


SINGLE CCT



2700K 3000K 3500K 4000K 5000K




tuneWHITE



1800K 3100K 1800K 4000K 2700K 6500K



DIMENSIONS (MM)




1200 (37W), 1500 (46W)



Downlight_ Workspace Lighting

Type	65mm width high-efficiency linear LED luminaire with up light and interlocking mechanism for continuous application
Material	Aluminium and PC
Finishing	Matt Black / Matt White
Cover	Micro-prismatic
Light Uniformity	Dot-less
Mounting	Suspended
CRI	ProART (CRI~95)
SDCM	3 step MacAdam ellipse binning
Lifetime	Up to 50,000 hours L80 lamp life at Ta = 25°C
Voltage	220-240V AC
Power (Length)	37W (1200mm), 46W (1500mm)
Beam Angle	80° (Down Light), 110° (Up Light)
Operating Temperature	Ta (min) = -20°C, Ta (max) = +50°C
Wire Connection	Push-pin terminals
IP Rating	IP20
Unified Glare Rating	UGR<19

PHOTOMETRICS





Downlight_ Workspace Lighting

SPECIFICATIONS

• Single CCT

CCT	Light Direction	Efficacy (lm/W)	Luminous Flux (lm)	
			46W (1500mm)	37W (1200mm)
2700K	Down Light	123.3	3434	2762
3000K	Up Light	123.9	2250	1810
3500K				
4000K	Down Light	129.5	3605	2900
5000K	Up Light	130.1	2362	1900

• tuneWHITE 1800K - 3100K

CCT	Light Direction	Efficacy (lm/W)	Luminous Flux (lm)	
			46W (1500mm)	37W (1200mm)
1800K	Down Light	117.4	3270	2630
	Up Light	118.1	2143	1724
3100K	Down Light	123.3	3434	2762
	Up Light	124.0	2250	1810

• tuneWHITE 1800K - 4000K

CCT	Light Direction	Efficacy (lm/W)	Luminous Flux (lm)	
			46W (1500mm)	37W (1200mm)
1800K	Down Light	117.4	3270	2630
	Up Light	118.1	2143	1724
4000K	Down Light	129.5	3605	2900
	Up Light	130.1	2362	1900

• tuneWHITE 2700K - 6500K

CCT	Light Direction	Efficacy (lm/W)	Luminous Flux (lm)	
			46W (1500mm)	37W (1200mm)
2700K	Down Light	123.3	3434	2762
	Up Light	123.9	2250	1810
6500K	Down Light	129.5	3605	2900
	Up Light	130.1	2362	1900



Downlight_ Workspace Lighting

ORDERING MATRIX

Model	Finishing		Mounting		Power		Beam Angle		CCT			Driver		
LT65FUL	WH	Matt White	PM	Suspended	37	37W (1200mm)	80110	80° (Down) 110° (Up)	Single CCT	27	2700K	ND	Non-dim	
		MB			Matt Black	46				46W (1500mm)	30			3000K
										35	3500K			
										40	4000K			
										50	5000K			
										tuneWHITE	TW1831	tuneWHITE 1800K-3100K	DA	DALI
											TW1840	tuneWHITE 1800K-4000K		
											TW2765	tuneWHITE 2700K-6500K		

Example:

LT65FUL-MB-PM-37-80110-40-ND

LT65FUL Linear Task Luminaire, Matt Black, Suspended, 37W (1200mm), 80° (Down) 110° (Up) Beam Angle, 4000K, Non-dim