

STARLITE MINI

1W IN GROUND LIGHT



FIXTURE COLOUR




Chrome


- Compact and stylish construction
- >28 lm/W module
- Colour rendering index: 85
- Colour temperature options: 2700K, 3000K, 4000K
- Beam pattern options: 80°
- Uniform and comfort light
- IP68 IK10
- Ø30mm cutout

AVAILABLE OPTIONS

BEAM ANGLE



COLOUR TEMPERATURE



ACCESSORIES




Embedded Pipe (for Flush Mount Installation)

DRIVER



(24V)

DIMENSIONS (MM)

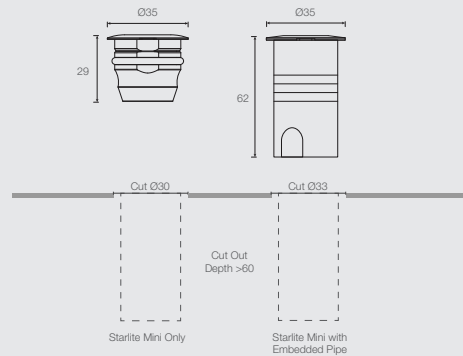

SYSTEM SPECIFICATIONS

			PROART CRI 95	
LED Lamp Power	Colour Temperature	Beam Angle	Intensity (cd)	Luminous Flux (lm)
1W	WARM : 2700K WARM : 3000K NATURAL : 4000K	80°	4	28

Data are based on 3000K. Nominal data of 2700K and 3500K are shared with 3000K. Higher CCT of 4000K and 5000K will have a nominal data value of 5% higher than published.

the table information is at nominal values accuracy of +/-7% nominal CRI ~85, equal to Ra >80-87, R9 > 0

DETAILS SPECIFICATION

Family Type	Starlite Series
Input Voltage	24V DC Constant Voltage
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C)
Dimming	Non-dimmable
Materials	Stainless Steel 316L, plastic
IP Code	IP68
IK Code	IK10
Regulatory Markings	CE, RoHs
Weight	0.06kg

ORDERING MATRIX CHART

Type	FIXTURE		LED MODULE			
	Colour	Accessories	LED Power	Beam Angle	Colour Temp	CRI
STARLITE-MINI	—	—	—	—	—	—
	CR Chrome	None	1 1W	80 80°	27 2700K	Standard
		EP Embedded Pipe			30 3000K	
				40 4000K		

example: STARLITE-MINI.CR.1.80.27

*24V drivers are not included and are sold separately.