



# QUAD TRACK

6W / 43W TRACK MOUNTED LUMINAIRE



FIXTURE COLOUR OPTIONS

-  Matt White
-  Matt Black

- Supplied with non-dimmable or phase/1-10V/DALI dimmable LED driver
- >90 lm/W module
- Colour rendering index: 95
- Colour temperature options: 2700K, 3000K, 4000K, 5000K
- Beam pattern options: 10°, 20° (6W)  
15°, 24°, 38°, 60° (43W)
- 3 steps MacAdam ellipse binning
- Uniform and comfort light
- IP20

## AVAILABLE OPTIONS


### TEMPERATURE



### DRIVER



### BEAM ANGLE

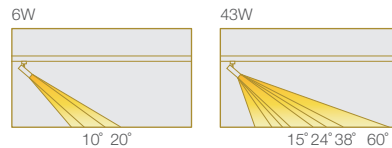


### ACCESSORIES



Local Brightness Adjuster

## DIMENSIONS (MM)

\*Displayed height measurements are for highest point of tilting.

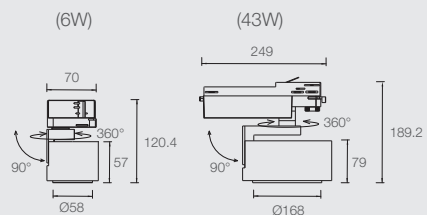

### SYSTEM SPECIFICATIONS

				PROART CRI 95		
LED Lamp Power	LED System Power	Colour	Beam Angle	Intensity (cd)	Luminous Flux	Driver Options
6W	8W	WARM : 2700K	10°	2700	710	ND, PH, AN, DA
			20°	2490		
43W	50W	WARM : 3000K NATURAL : 4000K COOL : 5000K	15°	22050	5080	
			24°	14450		
			38°	8580		
			60°	6480		

Data are based on 3000K. Nominal data of 2700K and 4000K are shared with 3000K. Higher CCT of 4000K will have a nominal data value of 5% higher than published.

the table information is at nominal values accuracy of +/-7% nominal CRI >95, equal to Ra >90-97, R9 > 50

### DETAILS SPECIFICATION

Family Type	Track Series
Mains voltage	220-240V
Colour options	Matt Black, Matt White
Installation Compatibility	Quad Track
Lifetime	50,000 HOURS (80% lumen maintenance at Ta = 25°C)
Dimming	Phase (triac) dimmer, 1-10V, DALI
Mains connection	Screw terminal connection
Accessories	Local Brightness Adjuster
Materials	Aluminium, plastic
Fire safety	Glow wire test 750°C, UL94V-0, VW-1
Flammability mark	F
IP code	IP20
Safety class	Class 2
Standards	IEC 60598-1, IEC 61347-2-13
Regulatory markings	CE, RoHs
Weight	0.3kg (6W) / 2.1kg (43W)
Dimensions	Ø58 x 120.4mm / Ø168 x 189.2mm

FIXTURE			LED MODULE				DRIVER	
Type	Colour	Accessories	LED Power	Beam Angle	Colour Temp	CRI	Dimming	
<b>QUAD-TR</b>	---	---	---	---	---	---	---	
	<b>WH</b> Matt White	None	<b>6</b> 6W	<b>10</b> 10°	<b>27</b> 2700K	<b>PA</b> ProART	<b>ND</b> Non-Dim	
	<b>MB</b> Matt Black	<b>LBA</b> Local Brightness Adjuster	<b>43</b> 43W	<b>20</b> 20°	<b>30</b> 3000K			<b>PH</b> Phase
				<b>15</b> 15°	<b>40</b> 4000K			<b>AN</b> 1-10V
				<b>24</b> 24°	<b>50</b> 5000K			<b>DA</b> DALI
				<b>38</b> 38°				
			<b>60</b> 60°					

example: QUAD-TR.WH.6.10.30.PA.ND