


# TUBE TRACK

12W / 18W TRACK  
MOUNTED LUMINAIRE



FIXTURE  
COLOUR OPTIONS

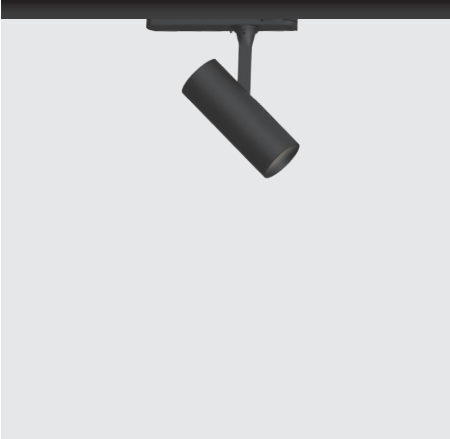

Matt White




Matt Black

- Supplied with non-dimmable or phase/0-10V/DALI dimmable LED driver
- >85 lm/W module
- Colour rendering index: 95
- Colour temperature options: 2700K, 3000K, 4000K
- Beam pattern options: 15°, 24°, 38°
- 3 steps MacAdam ellipse binning
- Uniform and comfort light
- Aluminium & Plastic Material
- IP20

## AVAILABLE OPTIONS

### TEMPERATURE



ProART

### DRIVER



(ND)



(PH)




(AN)



(DA)

### BEAM ANGLE



15° 24° 38°

### ACCESSORIES



Honeycomb  
Anti-Glare Louvre




Soft Lens



Local  
Brightness  
Adjuster

## DIMENSIONS (MM)

*\*Displayed height measurements are for highest point of tilting.*

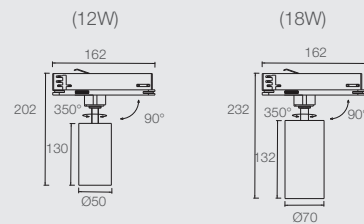

### SYSTEM SPECIFICATIONS

				PROART CRI 95		
LED Lamp Power	LED System Power	Colour	Beam Angle	Intensity (cd)	Luminous Flux	Driver Options
12W	15W	WARM : 2700K WARM : 3000K NATURAL : 4000K	15°	10074	940	ND, PH, AN, DA
			24°	5451		
			38°	2240		
18W	20W		15°	14480	1540	
			24°	7280		
			38°	3733		

Data are based on 3000K. Nominal data of 2700K and 4000K are shared with 3000K. Higher CCT of 4000K will have a nominal data value of 5% higher than published.

the table information is at nominal values accuracy of +/-7% nominal CRI -95, equal to Ra >90-97, R9 > 50

### DETAILS SPECIFICATION

Family Type	Tube Series
Mains voltage	220-240V
Colour options	Matt Black, Matt White
Installation Compatibility	Track Tube
Lifetime	50,000 HOURS (80% lumen maintenance at Ta = 25°C)
Dimming	Phase, 0-10V, DALI
Mains connection	Screw terminal connection
Accessories	Honeycomb Anti-Glare Louvre, Soft Lens, Local Brightness Adjuster
Materials	Aluminium, plastic
Fire safety	Glow wire test 750°C, UL94V-0, VW-1
Flammability mark	F
IP code	IP20
Safety class	Class 2
Standards	IEC 60598-1, IEC 61347-2-13
Regulatory markings	CE, CB, RCM
Dimensions	Ø50 x 130mm / Ø70 x 132mm

FIXTURE			LED MODULE				DRIVER	
Type	Colour	Accessories	LED Power	Beam Angle	Colour Temp	CRI	Dimming	
<b>TUBE-TR</b>								
<b>WH</b>	Matt White	None	<b>12</b> 12W	<b>15</b> 15°	<b>27</b> 2700K	<b>PA</b> ProART	<b>ND</b>	Non-Dim
<b>MB</b>	Matt Black	<b>AGL</b> Anti-Glare Louvre	<b>18</b> 18W	<b>24</b> 24°	<b>30</b> 3000K		<b>PH</b>	Phase
		<b>SL</b> Soft Lens		<b>38</b> 38°	<b>40</b> 4000K		<b>AN</b>	0-10V
		<b>LBA</b> Local Brightness Adjuster					<b>DA</b>	DALI

example: TUBE-TR.WH.12.15.30.PA.ND