


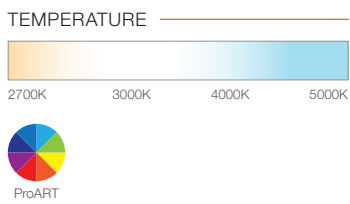


# VEGA WALL MOUNT

12W / 17W / 26W  
INDOOR WALL MOUNTED LUMINAIRE



1-10V and DALI driver are external mounted driver.

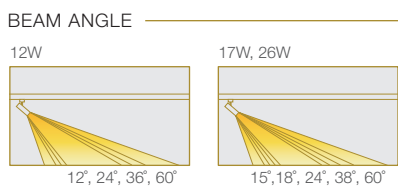


- Supplied with non-dimmable or phase/1-10V/DALI dimmable LED driver
- >110 lm/W module
- Colour rendering index: 95
- Colour temperature options: 2700K, 3000K, 4000K, 5000K
- Beam pattern options: 12°, 24°, 36°, 60° (12W)  
15°, 18°, 24°, 38°, 60° (17W, 26W)
- 3 steps MacAdam ellipse binning
- Uniform and comfort light
- IP20

## AVAILABLE OPTIONS

## DIMENSIONS (MM)

\*Displayed height measurements are for highest point of tilting.

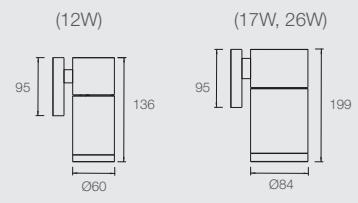

### SYSTEM SPECIFICATIONS

				PROART CRI 95		
LED Lamp Power	LED System Power	Colour	Beam Angle	Intensity (cd)	Luminous Flux	Driver Options
12W	15W	WARM : 2700K WARM : 3000K NATURAL : 4000K COOL : 5000K	12°	8330	1090	ND, PH, AN, DA
			24°	4675		
			36°	3417		
			60°	1275		
17W	20W		15°	11059	2060	
			18°	8279		
			24°	6962		
			38°	5100		
26W	30W		60°	2278	2690	
			15°	14544		
			18°	11875		
			24°	9359		
			38°	6307		
			60°	3188		

Data are based on 3000K. Nominal data of 2700K and 4000K are shared with 3000K.  
Higher CCT of 4000K will have a nominal data value of 5% higher than published.

the table information is at nominal values accuracy of +/-7%  
nominal CRI -95, equal to Ra >90-97, R9 > 50

DETAILS SPECIFICATION			
Family Type	Vega Series	Fire safety	Glow wire test 750°C, UL94V-0, VW-1
Mains voltage	220-240V	Flammability mark	F
Colour options	Matt White, Matt Black	IP code	IP20
Installation Compatibility	Vega Wall Mount	Safety class	Class 2
Lifetime	50,000 HOURS (80% lumen maintenance at Ta = 25°C)	Standards	IEC 60598-1, IEC 61347-2-13
Dimming	Phase (triac) dimmer, 1-10V, DALI (1-10V and DALI driver are external mounted driver)	Regulatory markings	CE, RoHs, ETL, SAA, CCC
Mains connection	Screw terminal connection	Weight	0.5kg (12W) / 1.0kg (17W, 26W)
Materials	Aluminium, plastic	Dimensions	Ø60 x 136mm / Ø84 x 199mm
Accessories	Honeycomb Anti-Glare Louvre, Cross Louvre, Barn Door (12W) Honeycomb Anti-Glare Louvre, Cross Louvre, Barn Door, Wallwash Ring, Eye Snoot, Snoot (17W, 26W)		

FIXTURE			LED MODULE				DRIVER
Type	Colour	Accessories	LED Power	Beam Angle	Colour Temp	CRI	Dimming
<b>VEGA-WM</b>	---	---	---	---	---	---	---
	<b>WH</b> Matt White	None	<b>12</b> 12W	<b>12</b> 12°	<b>27</b> 2700K	<b>PA</b> ProART	<b>ND</b> Non-Dim
	<b>MB</b> Matt Black	<b>AGL</b> Anti-Glare Louvre		<b>24</b> 24°	<b>30</b> 3000K		<b>PH</b> Phase
		<b>CL</b> Cross Louvre		<b>36</b> 36°	<b>40</b> 4000K		<b>AN</b> 1-10V
		<b>BD</b> Barn Door		<b>60</b> 60°	<b>50</b> 5000K		<b>DA</b> DALI
		<b>WR</b> Wallwash Ring	<b>17</b> 17W	<b>15</b> 15°			
		<b>ES</b> Eye Snoot	<b>26</b> 26W	<b>18</b> 18°			
		<b>S</b> Snoot		<b>24</b> 24°			
				<b>38</b> 38°			
				<b>60</b> 60°			

example: VEGA-WM.WH.12.12.30.PA.ND