

# VEGA ZOOM TRACK

12W / 17W / 26W TRACK MOUNTED LUMINAIRE



FIXTURE COLOUR OPTIONS



Matt White



Matt Black

**ELR**<sup>®</sup>



- Supplied with non-dimmable or phase/1-10V/DALI dimmable LED driver
- >80 lm/W module
- Colour rendering index: 95
- Colour temperature options: 2700K, 3000K, 4000K, 5000K
- Beam pattern options: zoomable 15° - 45° (12W)  
zoomable 25° - 60° (17W, 26W)
- 3 steps MacAdam ellipse binning
- Uniform and comfort light
- IP20

## AVAILABLE OPTIONS

### TEMPERATURE



ProART

### DRIVER



(ND)



(PH)



(AN)



(DA)

### BEAM ANGLE

12W



zoomable 15° - 45°

17W, 26W



zoomable 25° - 60°

### ACCESSORIES




Honeycomb Anti-Glare Louvre



Local Brightness Adjuster

## DIMENSIONS (MM)

\*Displayed height measurements are for highest point of tilting.

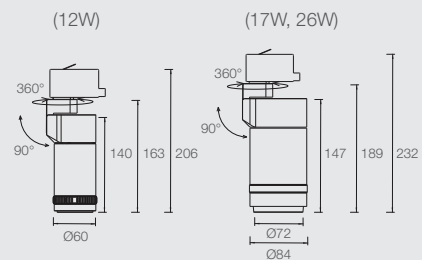

### SYSTEM SPECIFICATIONS

				PROART CRI 95		
LED Lamp Power	LED System Power	Colour	Beam Angle	Intensity (cd)	Luminous Flux	Driver Options
12W	15W	WARM : 2700K	zoomable 15°-45°	8016 - 2287	836 - 1066	ND, PH, AN, DA
17W	20W	WARM : 3000K NATURAL : 4000K	zoomable 25°-60°	7769 - 1649	1559 - 1758	
26W	30W	COOL : 5000K		10600 - 2372	1797 - 2058	

Data are based on 3000K. Nominal data of 2700K and 4000K are shared with 3000K. Higher CCT of 4000K will have a nominal data value of 5% higher than published.

the table information is at nominal values accuracy of +/-7% nominal CRI -95, equal to Ra >90-97, R9 > 50

### DETAILS SPECIFICATION

Family Type	Vega Zoom Series
Mains voltage	220-240V
Colour options	Matt Black, Matt White
Installation Compatibility	Vega Zoom Track
Lifetime	50,000 HOURS (80% lumen maintenance at Ta = 25°C)
Dimming	Phase (triac) dimmer, 1-10V, DALI
Mains connection	Screw terminal connection
Accessories	Honeycomb Anti-Glare Louve, Local Brightness Adjuster
Materials	Aluminium, plastic
Fire safety	Glow wire test 750°C, UL94V-0, VW-1
Flammability mark	F
IP code	IP20
Safety class	Class 2
Standards	IEC 60598-1, IEC 61347-2-13
Regulatory markings	CCC, CE, RoHs, ETL
Weight	0.6kg (12W) / 1.2kg (17W, 26W)
Dimensions	Ø60 x 140mm / Ø84 x 147mm

FIXTURE			LED MODULE				DRIVER
Type	Colour	Accessories	LED Power	Beam Angle	Colour Temp	CRI	Dimming
<b>VEGAZOOM-TR</b>	---	---	---	---	---	---	---
<b>WH</b>	Matt White	None	<b>12</b> 12W	<b>15Z45</b> 15°-45°	<b>27</b> 2700K	<b>PA</b> ProART	<b>ND</b> Non-Dim
<b>MB</b>	Matt Black	<b>AGL</b> Anti-Glare Louvre	<b>17</b> 17W	<b>25Z60</b> 25°-60°	<b>30</b> 3000K		<b>PH</b> Phase
		<b>LBA</b> Local Brightness Adjuster	<b>26</b> 26W		<b>40</b> 4000K		<b>AN</b> 1-10V
					<b>50</b> 5000K		<b>DA</b> DALI

example: VEGAZOOM-TR.WH.12.15Z45.30.PA.ND