

SNOOP 3 WALL MOUNT UP DOWN

OUTDOOR WALL MOUNTED
LUMINAIRE



**FIXTURE
COLOUR OPTIONS**

- Matt Grey RAL7001
- Matt Black RAL9011

**REFLECTOR
COLOUR OPTIONS**

- Matt Grey RAL7001
- Matt Black RAL9011


tuneWHITE™ and flexiK are recommended to be paired with Soft Lens for better colour mixing effect.

- Compatible with MR16, 35 and 50 NEST series LED modules
- Colour temperature options: 2700K, 3000K, 3500K, 4000K, 5000K, WARM DIM, flexiK, tuneWHITE™
- Colour rendering index: 85 or 95
- Up to 50,000 hours L80 lamp life with LM80 tested LED chip packages
- Beam pattern options: 10°, 15°, 20°, 35°, 60° (depending on LED module)
- Luminous Flux (lm): 420lm to 950lm (depending on LED module)
- Supplied with non-dimmable or phase/0-10V/DALI dimmable LED driver
- IP66 IK08
- ATePS™ Automated Thermal Protection System
- ComfyEYE, reduced flicker percentage
- X-BEAM, maximising light output ratio with converging optical lens
- Interchangeable LED module system
- Optional linear spread lens, soft lens and honeycomb anti-glare louvre
- Flat top to prevent waterlogging



AVAILABLE OPTIONS

LED MODULE




COLOUR TEMPERATURE



DRIVER




ACCESSORIES




BEAM ANGLE


SINGLE CCT
35 NEST / 50 NEST




WARM DIM
35 NEST / 50 NEST




SINGLE CCT
35 NEST ND+ / 50 NEST ND+



tuneWHITE™ / flexiK
50 NEST



DIMENSIONS (MM)

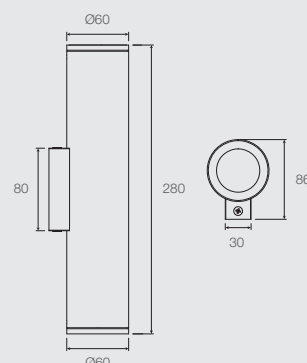


The information above is at nominal values accuracy of +/-7%.
For the latest specifications please refer to the website.

PHOTOMETRICS


SNOOP 3 WALL MOUNT

50 NEST ND+

POLAR DIAGRAM



CONE DIAGRAM




Ø = DIAMETER

	Emax (lx)			
	15°	20°	35°	60°
E (0°)	3734	3744	2202	763
Cone DØ (m)	0.33	0.34	0.60	1.22
E (0°)	933	936	550	191
Cone DØ (m)	0.66	0.68	1.19	2.43
E (0°)	415	416	245	85
Cone DØ (m)	0.99	1.03	1.79	3.65


Correction Factor : 35Nest ND+ - f = 0.67

50 NEST

POLAR DIAGRAM



CONE DIAGRAM




Ø = DIAMETER

	Emax (lx)			
	10°	20°	35°	60°
E (0°)	5555	5107	2324	805
Cone DØ (m)	0.19	0.25	0.60	1.22
E (0°)	1389	1277	581	201
Cone DØ (m)	0.37	0.51	1.19	2.43
E (0°)	617	567	258	89
Cone DØ (m)	0.56	0.77	1.79	3.65


Correction Factor : 35N - f = 0.74

50 NEST WARM DIM

POLAR DIAGRAM



CONE DIAGRAM




Ø = DIAMETER

	Emax (lx)			
	10°	20°	35°	60°
E (0°)	4296	2413	1419	491
Cone DØ (m)	0.19	0.34	0.60	1.22
E (0°)	1074	603	355	123
Cone DØ (m)	0.37	0.68	1.19	2.43
E (0°)	477	268	158	55
Cone DØ (m)	0.56	1.03	1.79	3.65


Correction Factor : 35N WD - f = 0.72

50 NEST tuneWHITE™ / flexiK

POLAR DIAGRAM



CONE DIAGRAM



Ø = DIAMETER

	Emax (lx)		
	20°	35°	60°
E (0°)	2496	1468	508
Cone DØ (m)	0.34	0.60	1.22
E (0°)	624	367	127
Cone DØ (m)	0.68	1.19	2.43
E (0°)	277	163	56
Cone DØ (m)	1.03	1.79	3.65

Correction Factor : Coin TWIK - f = 0.60

SNOOP 3 WALL MOUNT

ORDERING MATRIX CHART

FIXTURE						SINGLE CCT LED MODULE				DRIVER
Type	IP	Shape	Colour	Reflector Colour	Accessories	LED Power	Beam Angle	Colour Temp	CRI	Dimming
SNOOP-3WM										
	IP66	D	GR	GR	None	35N	10°	27	Standard	ND
		UD	MB	MB	AGL	50N	20°	30	PA	PH
					SL		35°	35		AN
					LSL		60°	40		DA
								50		
						35N	15°	27	PA	ND+ ^{PRO}
						50N	20°	30		
							35°	35		
							60°			
WARM DIM LED MODULE										DRIVER
						35N	10°	WD	PA	PH
						50N	20°			AN
							35°			DA
							60°			
tuneWHITE™ LED MODULE										DRIVER
						50N	20°	TW18	PA	DA
							35°	TW27		
							60°			
flexiK LED MODULE										DRIVER
						50N	20°	FK##	PA	PH
							35°			AN
							60°			DA

example: SNOOP-3WM.IP66.D.GR.GR.AGL.50N.35.27.PH
 *Custom RAL colour options available.

denotes the first two digits of preferred CCT ranging from 1800K to 6500K by increment of 100K