

PIAZZO 3 DUO TILT


RECESSED TWIN HEAD TILT
DOWNLIGHT LUMINAIRE



FIXTURE COLOUR OPTIONS

- Matt White RAL9003
- Matt Black RAL9011

FIXTURE REFLECTOR OPTIONS




tuneWHITE™ and flexiK are recommended to be paired with Soft Lens for better colour mixing effect.

- Compatible with Coin, MR16, 35 and 50 NEST series LED modules
- Colour temperature options: 2700K, 3000K, 3500K, 4000K, 5000K, WARM DIM, flexiK, tuneWHITE™
- Colour rendering index: 85 or 95
- Up to 50,000 hours L80 lamp life with LM80 tested LED chip packages
- Beam pattern options: 10°, 15°, 20°, 35°, 60° (depending on LED module)
- Luminous flux: 700lm to 1900lm (depending on LED module)
- Supplied with non-dimmable or phase/0-10V/DALI dimmable LED driver
- 88mm x 170mm cutout
- +/-20° tilt
- ATePS™ Automated Thermal Protection System
- ComfyEYE, reduced flicker percentage
- X-BEAM, maximising light output ratio with converging optical lens
- Interchangeable LED module system
- Optional Comfort Pro, linear spread lens, colour, light effect filters and honeycomb anti-glare louvre



AVAILABLE OPTIONS

LED MODULE




COLOUR TEMPERATURE



DRIVER




ACCESSORIES




BEAM ANGLE


SINGLE CCT
COIN / 35 NEST / 50 NEST / 50 CLASSIC




WARM DIM
COIN / 35 NEST / 50 NEST



SINGLE CCT
35 NEST ND+ / 50 NEST ND+




tuneWHITE™ / flexiK
COIN / 50 NEST



DIMENSIONS (MM)

**Displayed height measurements are for highest point of tilting.*

Coin : 58
35N : 79
50N : 102
MR16 : 79




PHOTOMETRICS


PIAZZO 3

50 NEST ND+

POLAR DIAGRAM



CONE DIAGRAM




Ø = DIAMETER

	Emax (lx)			
	15°	20°	35°	60°
E (0°)	3814	3824	2249	779
Cone DØ (m)	0.33	0.35	0.58	1.09
E (0°)	954	956	562	195
Cone DØ (m)	0.67	0.69	1.17	2.17
E (0°)	424	425	250	87
Cone DØ (m)	1.00	1.04	1.75	3.26


Correction Factor : 35Nest ND+ - f = 0.67

50 NEST

POLAR DIAGRAM



CONE DIAGRAM




Ø = DIAMETER

	Emax (lx)			
	10°	20°	35°	60°
E (0°)	5675	5217	2374	822
Cone DØ (m)	0.19	0.26	0.58	1.09
E (0°)	149	1304	594	206
Cone DØ (m)	0.37	0.51	1.17	2.17
E (0°)	631	580	264	91
Cone DØ (m)	0.56	0.77	1.75	3.25


Correction Factor : 35N - f = 0.74
Coin - f = 0.60

50 NEST WARM DIM

POLAR DIAGRAM



CONE DIAGRAM




Ø = DIAMETER

	Emax (lx)			
	10°	20°	35°	60°
E (0°)	4389	2465	1449	502
Cone DØ (m)	0.19	0.35	0.58	1.09
E (0°)	1097	616	362	126
Cone DØ (m)	0.37	0.69	1.17	2.17
E (0°)	488	274	161	56
Cone DØ (m)	0.55	1.04	1.75	3.25


Correction Factor : 35N WD - f = 0.72
COIN WD - f = 0.60

50 NEST tuneWHITE™ / flexiK

POLAR DIAGRAM



CONE DIAGRAM




Ø = DIAMETER

	Emax (lx)		
	20°	35°	60°
E (0°)	2550	1499	519
Cone DØ (m)	0.35	0.58	1.09
E (0°)	637	375	130
Cone DØ (m)	0.69	1.17	2.17
E (0°)	283	167	58
Cone DØ (m)	1.04	1.75	3.25

Correction Factor : Coin TWIK - f = 0.60

PIAZZO 3

ORDERING MATRIX CHART

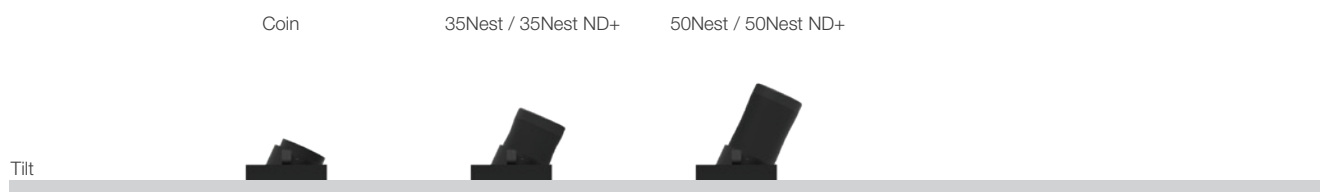

FIXTURE							SINGLE CCT LED MODULE					DRIVER
Type	Head	Shape	Reflector	Angle	Colour	Accessories	LED Power	Beam Angle	Colour Temp	CRI	Dimming	
PIAZZO-3												
U	UNO	SQ Square	F Flat	TL Tilt	WH Matt White	None	COIN 4.5W	10 10°	27 2700K	Standard	ND Non-Dim	
D	DUO		S Snoot		MB Matt Black	AGL Anti-Glare Louvre	35N 5.5W	20 20°	30 3000K	PA ProART	PH Phase	
T	TRIO					SL Soft Lens	50N 7.5W	35 35°	35 3500K		AN 0-10V	
						LSL Linear Spread Lens		60 60°	40 4000K		DA DALI	
						CP Comfort Pro			50 5000K			
							35N 5.8W	15 15°	27 2700K	PA ProART	ND+ PRO Non-Dim	
							50N 8.7W	20 20°	30 3000K			
								35 35°	35 3500K			
								60 60°				
WARM DIM LED MODULE											DRIVER	
							COIN 4.5W	10 10°	WD WARM DIM	PA ProART	PH Phase	
							35N 5.5W	20 20°			AN 0-10V	
							50N 7.5W	35 35°			DA DALI	
								60 60°				
tuneWHITE™ LED MODULE											DRIVER	
							COIN 4.5W	20 20°	TW18 tuneWHITE™ 1800K-4000K	PA ProART	DA DALI	
							50N 7.5W	35 35°	TW27 tuneWHITE™ 2700K-6500K			
								60 60°				
flexiK LED MODULE											DRIVER	
							COIN 4.5W	20 20°	FK## flexiK	PA ProART	PH Phase	
							50N 7.5W	35 35°			AN 0-10V	
								60 60°			DA DALI	

example: PIAZZO-3.U.SQ.S.TL.WH.SL.50N.35.30.DA
 *Custom RAL colour options available.

denotes the first two digits of preferred CCT ranging from 1800K to 6500K by increment of 100K.