

PIAZZO 4 TRIO TILT

RECESSED TRIO HEAD TILT
DOWNLIGHT LUMINAIRE




**FIXTURE
COLOUR OPTIONS**

○ Matt White RAL9003

● Matt Black RAL9011

FIXTURE REFLECTOR OPTIONS




tuneWHITE™ and flexiK are recommended to be paired with Soft Lens for better colour mixing effect.

- Compatible with Coin, 35, 50 and 100 series LED modules
- Colour temperature options: 2700K, 3000K, 3500K, 4000K, 5000K, WARM DIM, flexiK, tuneWHITE™
- Colour rendering index: 85 or 95
- Up to 50,000 hours L80 lamp life with LM80 tested LED chip packages
- Beam pattern options: 10°, 15°, 20°, 35°, 60° (depending on LED module)
- Luminous flux: 1050lm to 9000lm (depending on LED module)
- Supplied with non-dimmable or phase/0-10V/DALI dimmable LED driver
- 120mm x 340mm cutout
- +/-20° tilt
- ATePS™ Automated Thermal Protection System
- ComfyEYE, reduced flicker percentage
- X-BEAM, maximising light output ratio with converging optical lens
- Interchangeable LED module system
- Optional Comfort Pro, linear spread lens, colour, light effect filters and honeycomb anti-glare louvre




AVAILABLE OPTIONS

LED MODULE




COLOUR TEMPERATURE

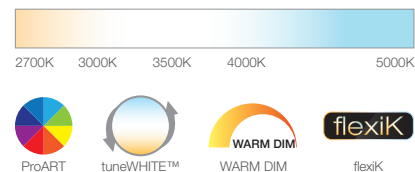


DRIVER



ACCESSORIES




BEAM ANGLE

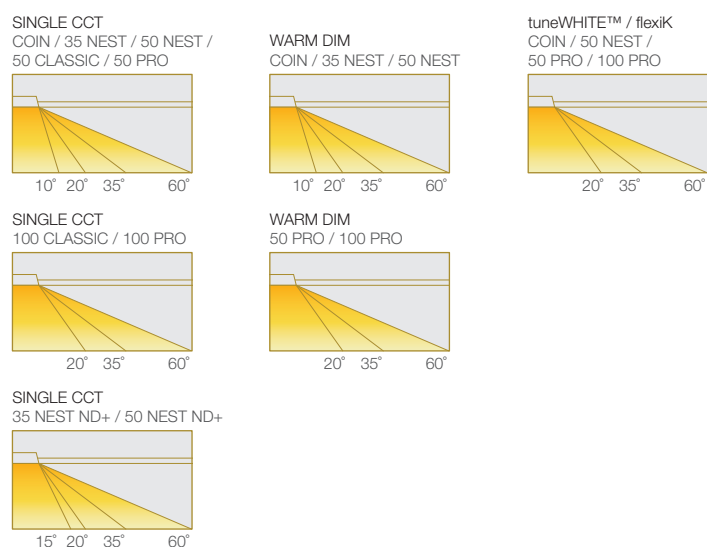

DIMENSIONS (MM)

**Displayed height measurements are for highest point of fitting.*

Coin	: 71
35N	: 92
50N	: 115
50C/P	: 118
100C/P	: 128

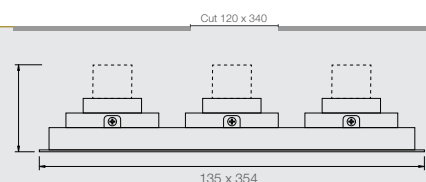


The information above is at nominal values accuracy of +/-7%.
For the latest specifications please refer to the website.

PHOTOMETRICS


PIAZZO 4 SQUARE

50 NEST ND+

POLAR DIAGRAM



CONE DIAGRAM




	E _{max} (lx)			
	15°	20°	35°	60°
E (0°)	3814	3824	2249	779
Cone DØ (m)	0.33	0.35	0.58	1.09
E (0°)	954	956	562	195
Cone DØ (m)	0.67	0.69	1.17	2.17
E (0°)	424	425	250	87
Cone DØ (m)	1.00	1.04	1.75	3.26


Correction Factor : 35Nest ND+ - f = 0.67

50 NEST WARM DIM

POLAR DIAGRAM



CONE DIAGRAM




	E _{max} (lx)			
	10°	20°	35°	60°
E (0°)	4389	2465	1449	502
Cone DØ (m)	0.19	0.35	0.58	1.09
E (0°)	1097	616	362	126
Cone DØ (m)	0.37	0.69	1.17	2.17
E (0°)	488	274	161	56
Cone DØ (m)	0.55	1.04	1.75	3.25


Correction Factor : 35N WD - f = 0.72
COIN WD - f = 0.60

50 PRO

POLAR DIAGRAM



CONE DIAGRAM




	E _{max} (lx)			
	10°	20°	35°	60°
E (0°)	9836	9043	3998	1385
Cone DØ (m)	0.19	0.26	0.58	1.09
E (0°)	2459	2261	1000	346
Cone DØ (m)	0.38	0.51	1.17	2.17
E (0°)	1093	1005	444	154
Cone DØ (m)	0.57	0.77	1.75	3.25


Correction Factor : 50C - f = 0.79
50N - f = 0.61
35N - f = 0.45
Coin - f = 0.36

50 PRO WARM DIM

POLAR DIAGRAM




CONE DIAGRAM




	E _{max} (lx)		
	20°	35°	60°
E (0°)	5439	3199	1108
Cone DØ (m)	0.35	0.58	1.09
E (0°)	1360	800	277
Cone DØ (m)	0.69	1.17	2.17
E (0°)	604	355	123
Cone DØ (m)	1.04	1.75	3.25

50 PRO tuneWHITE™ / flexiK

POLAR DIAGRAM



CONE DIAGRAM




	E _{max} (lx)		
	20°	35°	60°
E (0°)	4249	2499	866
Cone DØ (m)	0.35	0.58	1.09
E (0°)	1062	625	216
Cone DØ (m)	0.69	1.17	2.17
E (0°)	472	278	96
Cone DØ (m)	1.04	1.75	3.26


Correction Factor : 50N TWiK - f = 0.60
Coin TWiK - f = 0.36

100 PRO

POLAR DIAGRAM



CONE DIAGRAM



	E _{max} (lx)		
	20°	35°	60°
E (0°)	12050	6272	3305
Cone DØ (m)	0.40	0.68	1.00
E (0°)	3012	1568	826
Cone DØ (m)	0.81	1.37	1.99
E (0°)	1339	697	367
Cone DØ (m)	1.21	2.05	2.99

Correction Factor : 100C - f = 0.69
100P WD - f = 0.73
100C TWiK - f = 0.63

PIAZZO 4 SQUARE

ORDERING MATRIX CHART



FIXTURE							SINGLE CCT LED MODULE				DRIVER	
Type	Head	Shape	Reflector	Angle	Colour	Accessories	LED Power	Beam Angle	Colour Temp	CRI	Dimming	
PIAZZO-4												
U UNO	SQ Square	F Flat	TL Tilt	WH Matt White	None		COIN 4.5W	10 10°	27 2700K	Standard	ND Non-Dim	
D DUO		S Snoot		MB Matt Black	AGL Anti-Glare Louvre		35N 5.5W	20 20°	30 3000K	PA ProART	PH Phase	
T TRIO					SL Soft Lens		50N 7.5W	35 35°	35 3500K		AN 0-10V	
					LSL Linear Spread Lens		50C 10W	60 60°	40 4000K		DA DALI	
					CP Comfort Pro		50P 12W		50 5000K			
							35N 5.8W	15 15°	27 2700K	PA ProART	ND+ PRO Non-Dim	
							50N 8.7W	20 20°	30 3000K			
								35 35°	35 3500K			
								60 60°				
							100C 17W	20 20°	27 2700K	Standard	ND Non-Dim	
							100P 23W	35 35°	30 3000K	PA ProART	PH Phase	
								60 60°	35 3500K		AN 0-10V	
									40 4000K		DA DALI	
									50 5000K			
							WARM DIM LED MODULE				DRIVER	
							COIN 4.5W	10 10°	WD WARM DIM	PA ProART	PH Phase	
							35N 5.5W	20 20°			AN 0-10V	
							50N 7.5W	35 35°			DA DALI	
							50P 12W	60 60°				
							100P 23W					
*10° Beam angle option is only available with Coin, 35N and 50N WARM DIM LED Modules.												
							tuneWHITE™ LED MODULE				DRIVER	
							COIN 4.5W	20 20°	TW18 tuneWHITE™ 1800K-4000K	PA ProART	DA DALI	
							50N 7.5W	35 35°	TW27 tuneWHITE™ 2700K-6500K			
							50P 12W	60 60°				
							100P 23W					
							flexiK LED MODULE				DRIVER	
							COIN 4.5W	20 20°	FK## flexiK	PA ProART	PH Phase	
							50N 7.5W	35 35°			AN 0-10V	
							50P 12W	60 60°			DA DALI	
							100P 23W					

EXAMPLE: PIAZZO-4.U.SQ.S.TL.WH.SL.100P.35.30.DA

*Custom RAL colour options available.

denotes the first two digits of preferred CCT ranging from 1800K to 6500K by increment of 100K.