



BLOCK RECESSED TILT

6.3W LINEAR RECESSED
DOWNLIGHT LUMINAIRE




- Supplied with non-dimmable or 0-10V/DALI dimmable LED driver
- >80 lm/W module
- Colour rendering index: 95
- Colour temperature options: 2700K, 3000K, 4000K, 5000K
- Beam pattern options: 12°, 34°, 48°
- 3 steps MacAdam ellipse binning
- Uniform and comfort light
- +/-30° tilt
- IP20
- 95mm x 42mm cutout

FIXTURE COLOUR OPTIONS




AVAILABLE OPTIONS


DRIVER




COLOUR TEMPERATURE

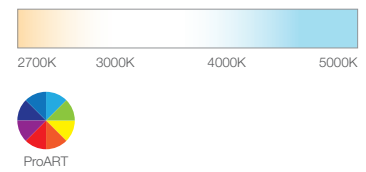

BEAM ANGLE



DIMENSIONS (MM)



SYSTEM SPECIFICATIONS

				PROART CRI 95		
LED Lamp Power	LED System Power	Colour Temperature	Beam Angle	Intensity (cd)	Luminous Flux (lm)	Driver Options
6.3W	7.2W	WARM : 2700K	12°	4730	510	ND, AN, DA
		WARM : 3000K	34°	1130		
		NATURAL : 4000K	48°	865		
		COOL : 5000K				

Data are based on 3000K. Nominal data of 2700K and 3500K are shared with 3000K.
Higher CCT of 4000K and 5000K will have a nominal data value of 5% higher than published.

the table information is at nominal values accuracy of +/-7% nominal CRI >95, equal to Ra >90-97, R9 > 50

DETAILS SPECIFICATION

Family Type	Block Series
Mains Voltage	220-240V
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C)
Dimming	0-10V, DALI
Mains Connection	Screw terminal connection
Materials	Aluminium, plastic
Fire Safety	Glow wire test 850°C, UL94V-0, VW-1
Flammability Mark	F
IP Code	IP20
Safety Class	Class 2
Standards	IEC 60598-1, IEC 61347-2-13
Regulatory Markings	CE, ENEC, RoHS
Weight	0.4kg

ORDERING MATRIX CHART

FIXTURE				LED MODULE				DRIVER
Type	Shape	Angle	Colour	LED Power	Beam Angle	Colour Temp	CRI	Dimming
BLOCK	---	---	---	---	---	---	---	---
R	Recessed	TL Tilt	WH Matt White	6 6.3W	12 12°	27 2700K	PA ProART	ND Non-Dim
			MB Matt Black		34 34°	30 3000K		AN 0-10V
			CR Chrome		48 48°	40 4000K		DA DALI
			CP Copper			50 5000K		

example: BLOCK.R.TL.WH.6.12.30.PA.ND