

# SNOOP 3 PENDANT






## PENDANT MOUNTED LUMINAIRE



### FIXTURE COLOUR OPTIONS

-  Matt White  
RAL9003
-  Matt Black  
RAL9011

### REFLECTOR COLOUR OPTIONS

-  Matt White
-  Matt Black
-  Matt White /  
Matt Black
-  Chrome  
Black
-  Chrome  
Gold

*tuneWHITE™ and flexiK are recommended to pair with Soft Lens for better colour mixing effect.*

- Compatible with MR16, 35 and 50 series LED modules
- Colour temperature options: 2700K, 3000K, 3500K, 4000K, 5000K, tuneWHITE™, WARM DIM, flexiK
- Colour rendering index: 85 or 95
- Up to 50,000 hours L80 lamp life with LM80 tested LED chip packages
- Beam pattern options: 10°, 15°, 20°, 35°, 60° (depending on LED module)
- Luminous flux: 420lm to 950lm (depending on LED module)
- Supplied with phase, 0-10V, DALI dimmable, with local dimming features
- ATePS™ Automated Thermal Protection System
- ComfyEYE, reduced flicker percentage
- X-BEAM, maximising light output ratio with converging optical lens
- Interchangeable LED module system
- Optional linear spread lens, soft lens and honeycomb anti-glare louvre



### AVAILABLE OPTIONS

#### LED MODULE




#### TEMPERATURE



#### DRIVER




#### ACCESSORIES

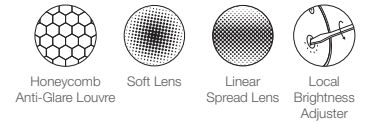


#### BEAM ANGLE


SINGLE CCT  
35 NEST / 50 NEST




WARM DIM  
35 NEST / 50 NEST



SINGLE CCT  
35 NEST ND+ / 50 NEST ND+




tuneWHITE™ / flexiK  
50 NEST



### DIMENSIONS (MM)

*\*Displayed height measurements are for highest point of tilting.*

- A1 : 680mm
- A2 : 1000mm
- A3 : 48mm
- A4 : Ø60
- B1 : 480mm
- B2 : 1000mm
- B3 : 48mm
- B4 : Ø60
- C1 : 280mm
- C2 : 1000mm
- C3 : 48mm
- C4 : Ø60
- D1 : 180mm
- D2 : 1000mm
- D3 : 48mm
- D4 : Ø60




*The information above is at nominal values accuracy of +/-7%.  
For the latest specifications please refer to the website.*

PHOTOMETRICS


# SNOOP 3 PENDANT

## 50 NEST ND+

POLAR DIAGRAM



CONE DIAGRAM




Ø = DIAMETER

	E <sub>max</sub> (lx)			
	15°	20°	35°	60°
E (0°)	3734	3744	2202	763
Cone DØ (m)	0.33	0.34	0.60	1.22
E (0°)	933	936	550	191
Cone DØ (m)	0.66	0.68	1.19	2.43
E (0°)	415	416	245	85
Cone DØ (m)	0.99	1.03	1.79	3.65


Correction Factor : 35Nest ND+ - f = 0.67

## 50 NEST

POLAR DIAGRAM



CONE DIAGRAM




Ø = DIAMETER

	E <sub>max</sub> (lx)			
	10°	20°	35°	60°
E (0°)	5555	5107	2324	805
Cone DØ (m)	0.19	0.25	0.60	1.22
E (0°)	1389	1277	581	201
Cone DØ (m)	0.37	0.51	1.19	2.43
E (0°)	617	567	258	89
Cone DØ (m)	0.56	0.77	1.79	3.65


Correction Factor : 35N - f = 0.74

## 50 NEST WARM DIM

POLAR DIAGRAM



CONE DIAGRAM




Ø = DIAMETER

	E <sub>max</sub> (lx)			
	10°	20°	35°	60°
E (0°)	4296	2413	1419	491
Cone DØ (m)	0.19	0.34	0.60	1.22
E (0°)	1074	603	355	123
Cone DØ (m)	0.37	0.68	1.19	2.43
E (0°)	477	268	158	55
Cone DØ (m)	0.56	1.03	1.79	3.65


Correction Factor : 35N WD - f = 0.72

## 50 NEST tuneWHITE™ / flexiK

POLAR DIAGRAM



CONE DIAGRAM



Ø = DIAMETER

	E <sub>max</sub> (lx)		
	20°	35°	60°
E (0°)	2496	1468	508
Cone DØ (m)	0.34	0.60	1.22
E (0°)	624	367	127
Cone DØ (m)	0.68	1.19	2.43
E (0°)	277	163	56
Cone DØ (m)	1.03	1.79	3.65

Correction Factor : Coin TWIK - f = 0.60

# SNOOP 3 PENDANT

## ORDERING MATRIX CHART

FITTURE					SINGLE CCT LED MODULE					DRIVER
Type	Length	Colour	Reflector Color	Accessories	LED Power	Beam Angle	Colour Temp	CRI	Dimming	
<b>SNOOP-3PM</b>	—	—	—	—	—	—	—	—	—	
<b>18</b>	180MM	<b>WH</b> Matt White	<b>WH</b> Matt White	<b>AGL</b> Anti-Glare Louvre	<b>35N</b> 7.5W	<b>10</b> 10°	<b>27</b> 2700K	Standard	<b>ND</b> Non-Dim	
<b>28</b>	280MM	<b>MB</b> Matt Black	<b>MB</b> Matt Black	<b>SL</b> Soft Lens	<b>50N</b> 10W	<b>20</b> 20°	<b>30</b> 3000K	<b>PA</b> ProART	<b>PH</b> Phase	
<b>48</b>	480MM		<b>WB</b> White/Black	<b>LSL</b> Linear Spread Lens		<b>35</b> 35°	<b>35</b> 3500K		<b>AN</b> 0-10V	
<b>68</b>	680MM		<b>CB</b> Chrome Black	<b>LBA</b> Local Brightness Adjuster		<b>60</b> 60°	<b>40</b> 4000K		<b>DA</b> DALI	
			<b>CG</b> Chrome Gold				<b>50</b> 5000K			
					<b>35N</b> 6.4W	<b>15</b> 15°	<b>27</b> 2700K	<b>PA</b> ProART	<b>ND+</b> PRO Non-Dim	
					<b>50N</b> 9.5W	<b>20</b> 20°	<b>30</b> 3000K			
						<b>35</b> 35°	<b>35</b> 3500K			
						<b>60</b> 60°				
					WARM DIM LED MODULE					DRIVER
					<b>35N</b> 7.5W	<b>10</b> 10°	<b>WD</b> WARM DIM	<b>PA</b> ProART	<b>PH</b> Phase	
					<b>50N</b> 10W	<b>20</b> 20°			<b>AN</b> 0-10V	
						<b>35</b> 35°			<b>DA</b> DALI	
						<b>60</b> 60°				
					tuneWHITE™ LED MODULE					DRIVER
					<b>50N</b> 10W	<b>20</b> 20°	<b>TW18</b> tuneWHITE™ 1800K-4000K	<b>PA</b> ProART	<b>DA</b> DALI	
						<b>35</b> 35°	<b>TW27</b> tuneWHITE™ 2700K-6500K			
						<b>60</b> 60°				
					flexiK LED MODULE					DRIVER
					<b>50N</b> 10W	<b>20</b> 20°	<b>FK##</b> flexiK	<b>PA</b> ProART	<b>PH</b> Phase	
						<b>35</b> 35°			<b>AN</b> 0-10V	
						<b>60</b> 60°			<b>DA</b> DALI	

example: SNOOP-3PM.18.WH.WH.AGL.35N.20.27.PA.PH  
 \*Custom RAL colour options available.

## denotes the first two digits of preferred CCT ranging from 1800K to 6500K by increment of 100K